
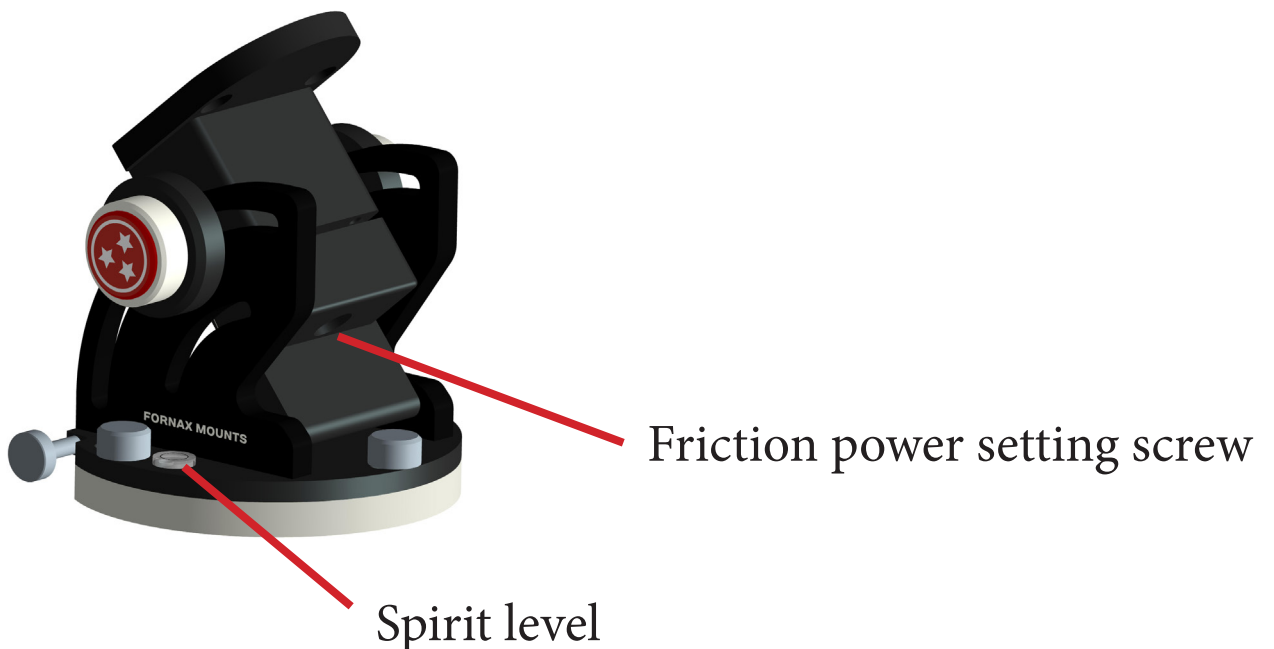


FMW-200 WEDGE

Designed for LighTrack II Tracking Mount

-User Manual-

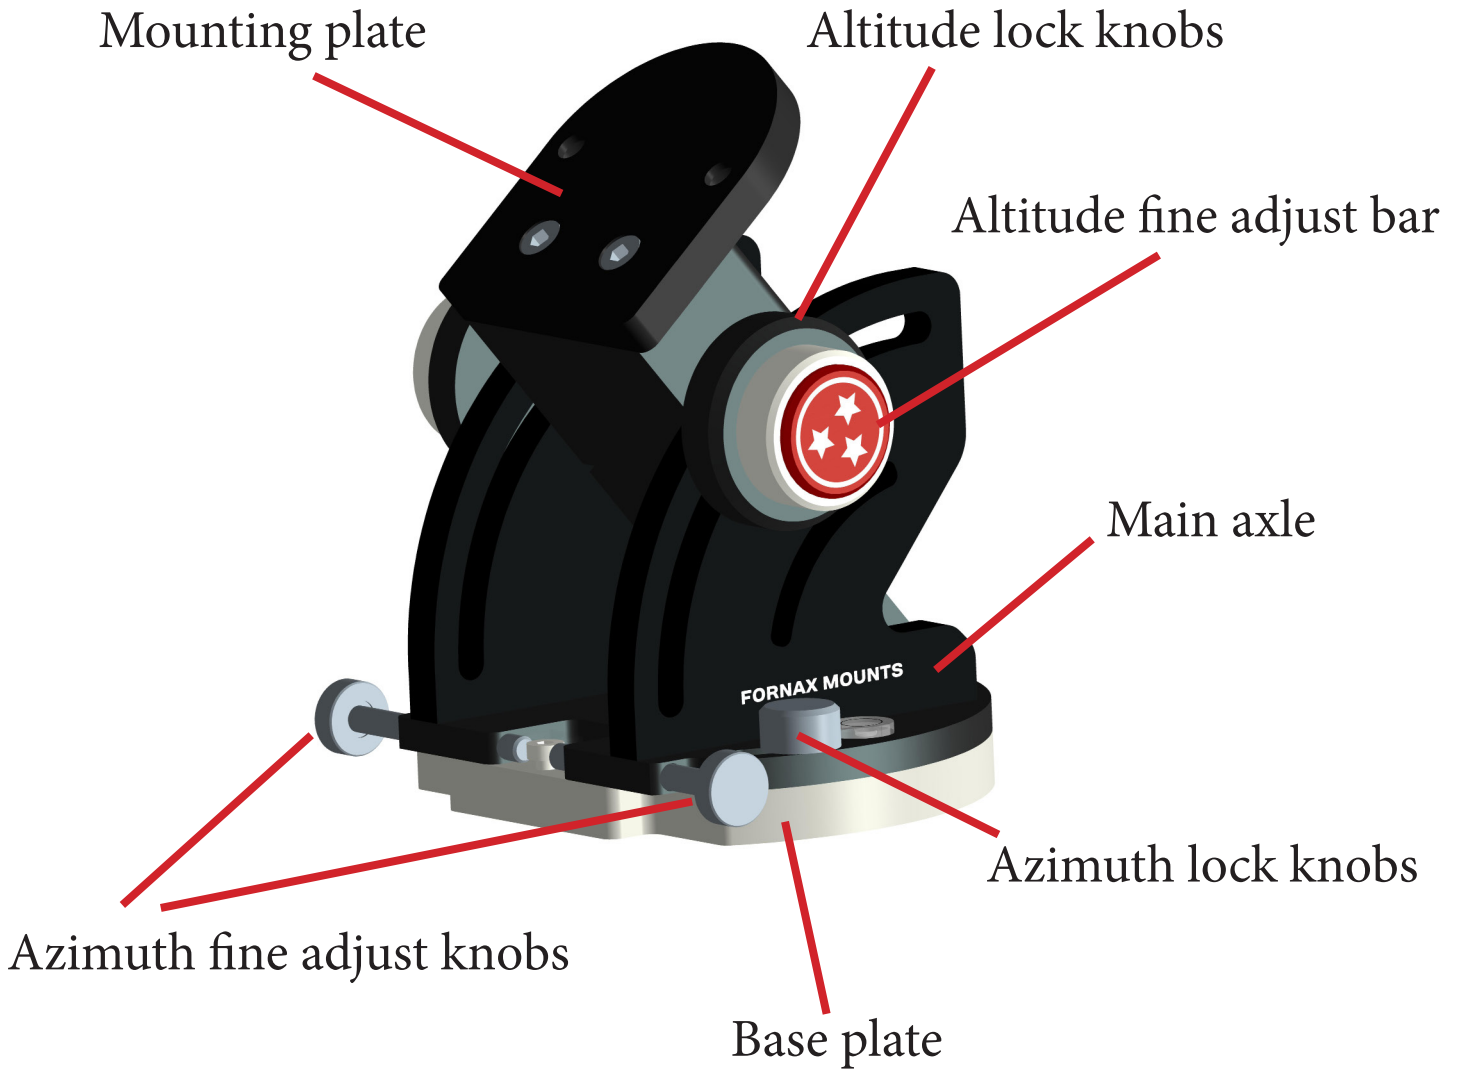

How to use

Attaching to your Tripod

The base has a central 3/8" threaded hole so you can mount your FMW-200 Wedge on a standard photo tripod. Wind the FMW-200 down onto the tripod thread until it is tight against the top of the tripod.

Attaching your LighTrack II tracking mount

Attach your LighTrack II to the mounting plate with the two provided metric M6x6 allen screws.

Levelling

Polar alignment is made easier by leveling the tripod and the FMW-200 Wedge using the built in spirit level.

Balancing your Equipment

For optimum performance we recommend balancing your equipment so that your FMW-200 doesn't experience large twisting forces which can lead to trailed images.

Setting Altitude

Setting Altitude with the help of the FMW-200 is a breeze. All you have to do is set the desired angle using the Altitude fine adjust bar. Once the angle is set, fix the wedge using the Altitude lock knobs.

Setting Azimuth

You can set the Azimuth axis with the Azimuth fine adjust knobs.

For more help of polar alignment please check the LighTrack II Installation Guide.

Care and Maintenance

Clean your FMW-200 with warm soapy water and gently dry with a soft cloth. Avoid solvent based cleaners as they may damage the surface.

Safety Warnings

Keep fingers clear of inner parts of wedge when making altitude and azimuth adjustments. Keep from reach of small children. Ensure that your equipment is securely fastened to the wedge and cannot move suddenly or fall before operation. Never remove any of the wedge knobs or levers when the wedge is loaded.

Specifications

Dimensions 140 x 120 x 100 mm (5.5 x 4.7 x 3.9 inches)

Weight 1,1 kg (2.4 lbs)

Load capacity 15 kg (33 lb)

Latitude range greater than 15-75 degrees

Azimuth adjustment 15 degrees

Tripod mounting 3/8" UNC photo thread

LighTrack II mounting 2 x metric 6 mm allen screws

For more help please visit: <http://fornaxmounts.com/support.html>